


Feature

- Current Rating:350mAac
- Voltage-Time:11uS
- Coplanarity:0.1[.004]Max
- Complies with the following requirements as defined by IEC60950-1,EN60950-1,UL60950-1/CSA60950-1 and AS/NZS60950-1
 -Functional insulation for a primary circuit at a working voltage of 400Vrms
- Comply with RoHS requirements.
- Operating temperature range:-40°C to +125°C.
- Qualified to AEC-Q200


Electrical Specifications @ 25°C

PAPAMETER	TEST CONDITIONS	VALUE
D.C.RESISTANCE 1-3	@20°C	0.35 ohms max
D.C.RESISTANCE 6-4	@20°C	0.57 ohms max
INDUCTANCE 1-3	10KHZ 100 mVac. LS	475 uH min
INTERWINDING CAPACITANCE 1-6	100KHZ 10 mVac. CS	17.5pF typ
DIELECTRIC 1-6	3125Vac 1 seconds	2500Vac, 1 minute
URNS RATIO	6-4:1-3	2:1±2%

Schematic

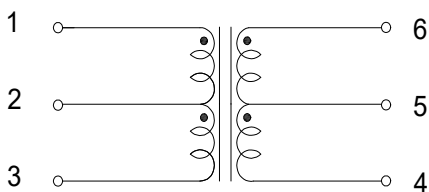

Mechanical

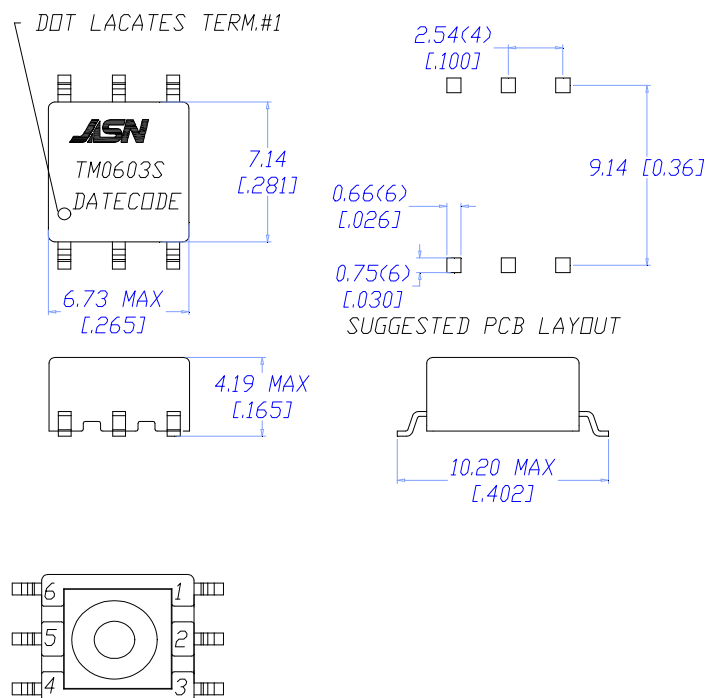

Unit: mm (inch)

Unless otherwise specified, all tolerances are ±0.25