


**Feature**

- Comply with RoHS requirements.
- Operating temperature range: -40°C to +125°C.
- Storage temperature range: -40°C to +125°C.


**Electrical Specifications @ 25°C**

OCL:	(1-3)= 650uH Min. @100KHz/0.1V
Hi-Pot :	Pri to Sec: 1250VAC 0.5mA 1Sec
Turns Ratio:	(6-4):(1-3)= 3CT:1CT±2%
LK:	(1-3,shorted 6-4)= 0.6uH Max @100KHz/0.1V
DCR:	(1-3) : 0.8ohm Max
	(6-4): 2.0ohm Max

**Schematic**

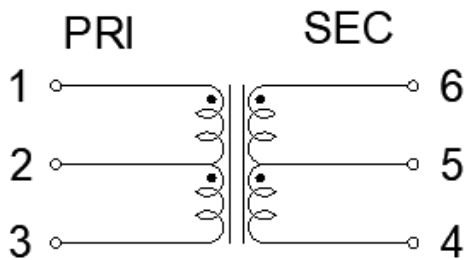

**Mechanical**

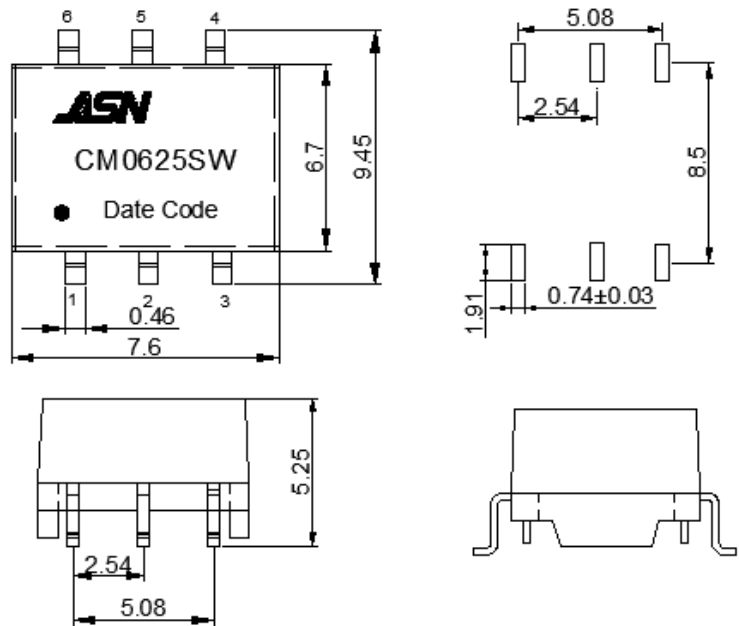

Unless otherwise specified, all tolerances are ±0.25mm