

Feature






- Comply with RoHS requirements.
- Operating temperature range: -40°C to +125°C.
- Storage temperature range: -40°C to +125°C.
- Current Rating: 350mA AC,
- Voltage-TIME: 11VuS.

Electrical Specifications @ 25°C

OCL:	(1-3)= 340uH Min. @100KHz/0.1V
Hi-Pot :	6250VAC 1mA 1Sec
Turns Ratio:	(6-4): (1-3)2CT:1 CT±2%
DCR:	(1-3): 0.436ohm Max
	(6-4) : 0.581hm Max
INTERWINDING CAPACITANCE:	(1-6): 5.5pF Typ 100KHz/10mV

Schematic

Mechanical

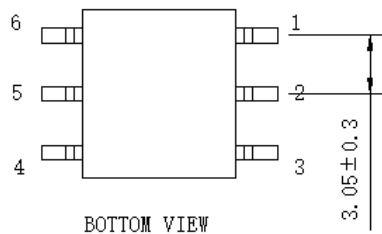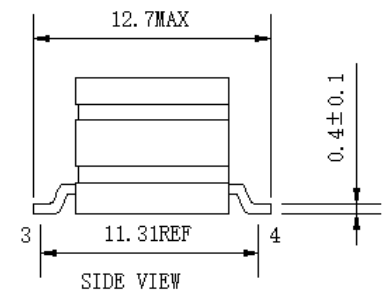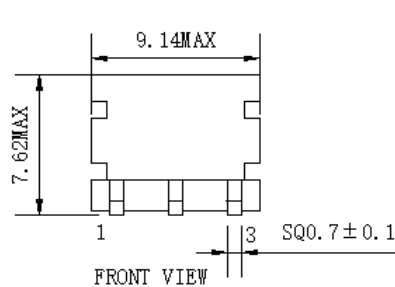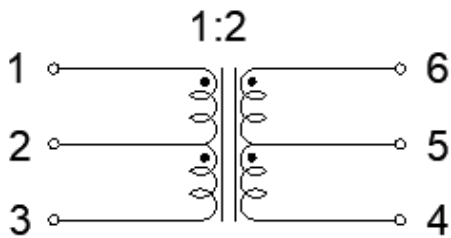

Unless otherwise specified, all tolerances are ±0.25mm